



DHP-AT air source heat pump

A flexible and compact heat pump that is simple to install

The DHP-AT air source heat pump provides heating, hot water and cooling for a wide range of domestic properties.

Operating at high performance levels, the DHP-AT works down to temperatures as low as -15°C .

Accumulating 8 decades of knowledge and experience, the DHP-AT was developed to support

various applications, creating a fully flexible air source heat pump.

The DHP-AT consists of 2 major units: the outdoor unit containing the heat pump, and the indoor control panel. Limiting the pipe and cabling means quicker and simplified installation for you, and a compact heating system for your customer.



2

Major units

An outdoor unit and an internal control panel are the only major components, and the connections are limited for a quick and simple installation





Technical specification Danfoss DHP-AT

DHP-AT delivery set

Heat pump
Control unit with connection cord
Document set
Flexibel hose for drainage of condensate water
Buffer tank sensor
Hot water tank sensor

Connection heat pump

	DHP-AT 6	DHP-AT 8
1 Supply line pipe (red label)	DN 20	DN 25
2 Return line pipe (blue label)	DN 20	DN 25
3 Air inlet		
4 Air outlet		
5 Operator panel		
6 Hot water and buffer tank sensors		
7 Power supply		

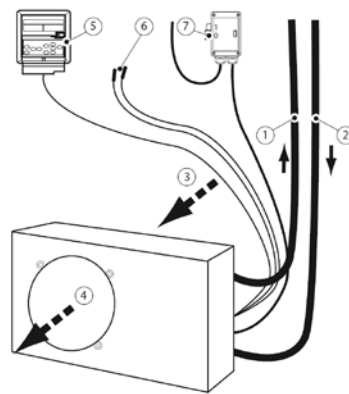

DHP-AT

			6kW	8kW
Refrigerant	Type		R410A	R410A
	Amount	kg	2.2	2.5
	Test pressurization	MPa	3.1	3.1
	Design pressure	MPa	4.2	4.2
Compressor	Type		Rotary	Rotary
	Oil		HAF68D1/68HES-H	HAF68D1/68HES-H
Electrical data 1-N 50Hz heat pump	Mains power supply	V	230	230
	Rated power, compressor	kW	1.7	2.5
	Rated power, fan	kW	0.044	0.044
	Rated power, internal electrical heater	kW	3	3
	Start current, heat pump ¹	A	30	28
	Fuse	A	25	25
	COP ²		3.0	2.9
Performance (new heat pump with clean heat exchanger)	Heating capacity ²	kW	4.0	5.8
	Power input ²	kW	1.4	2.0
	COP ³		4.0	4.0
	Heating capacity ³	kW	5.7	8.3
	Power input ³	kW	1.4	2.0
	COP ⁴		4.3	4.3
	Heating capacity ⁴	kW	6.0	8.5
	Power input ⁴	kW	1.4	2.0
	EER ⁴		2.7	2.6
	Cooling capacity ⁵	kW	4.4	6.2
Nominal flow ⁶	Heating circuit	l/s	0.142	0.205
	Ambient air operating range (outdoor unit)	°C	-15 ~ +43	-15 ~ +43
Max temperatures ⁷	Heating circuit	°C	50	50
	Hot water heating	°C	55	55
Fan speed		rpm	700	700
Sound level	Sound power at normal operation ⁸	dB(A)	65.3	64.5
	Sound pressure at normal operation, 1 meter ⁹	dB(A)	53.7	52.8
Heat pump (outdoor unit)	Dimensions L x W x H	mm	1028x460x660	1028x460x760
	Weight (empty)	kg	90	101
	Pipe connections (supply line and return line)		DN 20	DN 25
Control unit (indoor unit)	Dimensions L x W x H	mm	120x20x120	120x20x120
	Weight	kg	0.2	0.2
Installation distance restrictions	Heat pump, minimum free distance from wall directly behind evaporator inlet	cm	30	30
	Maximum distance between outdoor and indoor unit	m	10	10

The measurements are performed on a limited number of heat pumps which can cause variations in the results. Tolerances in the measuring methods can also cause variations.

- 1) According to IEC61000.
- 2) At operating point A2/W35 in accordance with EN14511, including fan, defrost, and correction for external circulation pump
- 3) At operating point A7/W35 in accordance with EN14511, including fan, defrost, and correction for external circulation pump
- 4) At operating point A7/W35 Δ10K hot side in accordance with EN255
- 5) At operating point A35/W7 according to EN14511

- 6) Nominal flow for heat circuit Δ10K between supply line and return line
- 7) Heat pump operation only, at 0 °C outdoor temperature
- 8) Outdoor unit, sound power level measured according to EN ISO 3741 at A7/W35 and frost-free evaporator
- 9) Outdoor unit, sound pressure level measured according to ISO 11203, cuboid-shaped measuring surface

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are registered trademarks of Danfoss A/S. All rights reserved