



## DHP-L Opti ground source heat pump with DWH water heater

# Minimum energy consumption thanks to optimized speed control

The DHP-L Opti uses Opti technology that incorporates an intelligent control system using speed controlled circulation pumps to ensure the output is constantly adjusted to the prevailing requirements and conditions of both the heating system and collector. This means the heat pump will always operate under ideal conditions, therefore guaranteeing maximum efficiency, second by second, hour by hour.

The DHP-L Opti features a separate hot water tank, thus lowering the heat pumps height for smaller plant rooms, and when connected to the DWH, can produce large quantities of domestic hot water whilst using a

minimum amount of energy. This is made possible by our patented technology TWS\* producing hot water faster than traditional alternatives can allow. You can also connect DHP-L Opti to your existing hot water tank.

This heat pump operates at a low sound level and it can easily be adapted to produce cost effective cooling. There is an option to control and monitor DHP-L Opti via the Internet.

The control system, although highly advanced is both intuitive and user friendly.



# Compact

hot water using TWS\*


The DHP-L Opti has a lowered height to fit into smaller locations. This unit is a heating only solution that can be combined with our DWH for all your heating and hot water needs.




**Connection heat pump**

The brine lines can be connected on either the left or right-hand sides of the heat pump.

- 1 Brine in, 28 Cu
- 2 Brine out, 28 Cu
- 3 Heating system supply line, 22 Cu: 4-10 kW, 28 Cu: 12-16 kW
- 4 Heating system return line, 22 Cu: 4-10 kW, 28 Cu: 12-16 kW
- 5 Lead-in for supply, sensor and communication cables
- 6 Return line from water heater

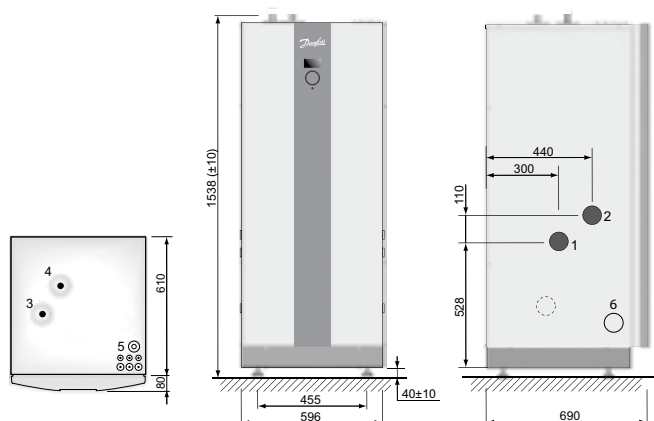
**Connection water heater**

- 1 Return line to heat pump
- 2 Hot water
- 3 Cold water
- 4 Supply line from heat pump
- 5 Electric lead-in
- 6 Connection for bleed valve
- 7 Combined temperature and pressure relief valve

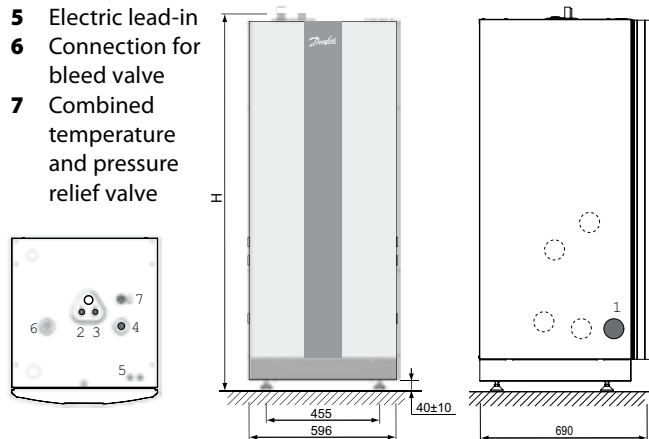

DWH			200	300
Volume	Sec/Prim	l	180/7.5	286/10
Design pressure	Sec/Prim	MPa	1.0/0.3	1.0/0.3
Test pressure	Sec/Prim	MPa	1.43/0.43	1.43/0.43
Weight empty		kg	141	147
Weight filled		kg	321	433
Height	H	mm	1538	1835

DHP-L Opti			4	6	8	10	12	16
Refrigerant	Type		R407C	R407C	R407C	R407C	R407C	R407C
	Amount	kg	0.75	1.20	1.35	1.45	1.55	2.00
Compressor	Type			Scroll	Scroll	Scroll	Scroll	Scroll
	Main supply	Volt	400	400	400	400	400	400
Electrical data 3-N~50Hz	Rated power, compressor	kW	2.3	3.0	3.2	4.2	5.0	7.2
	Rated power, circulation pumps	kW	0.1	0.1	0.1	0.3	0.3	0.5
	Auxiliary heater, 3 steps	kW	3/6/9	3/6/9	3/6/9	3/6/9	3/6/9	3/6/9
	Start current <sup>1</sup>	A	15	9	10	12	14	20
	Fuse	A	16 <sup>7</sup> /10 <sup>4</sup> /10 <sup>5</sup> /16 <sup>6</sup>	10 <sup>4</sup> /16 <sup>5</sup> /20 <sup>6</sup>	16 <sup>4</sup> /16 <sup>5</sup> /20 <sup>6</sup>	16 <sup>4</sup> /16 <sup>5</sup> /20 <sup>6</sup>	16 <sup>4</sup> /20 <sup>5</sup> /25 <sup>6</sup>	20 <sup>4</sup> /20 <sup>5</sup> /25 <sup>6</sup>
	Main supply	Volt	230	230	230	230	230	**
Electrical data 1-N~50Hz	Rated power, compressor	kW	2.3	3.2	3.6	4.5	5.5	**
	Rated power, circulation pumps	kW	0.1	0.1	0.1	0.3	0.3	**
	Auxiliary heater, 3 steps	kW	1.5/3/4.5	1.5/3/4.5	1.5/3/4.5	1.5/3/4.5	1.5/3/4.5	**
	Start current <sup>1</sup>	A	15	22	24	26	28	**
	Fuse	A	20 <sup>4</sup> /25 <sup>5</sup> /32 <sup>6</sup>	25 <sup>4</sup> /32 <sup>5</sup> /40 <sup>6</sup>	25 <sup>4</sup> /32 <sup>5</sup> /40 <sup>6</sup>	32 <sup>4</sup> /40 <sup>5</sup> /50 <sup>6</sup>	32 <sup>4</sup> /40 <sup>5</sup> /50 <sup>6</sup>	**
	Main supply	Volt	230	230	230	230	230	**
Performance	COP <sup>2</sup>		4.57	4.74	4.88	4.84	4.75	4.80
	COP <sup>3</sup>		4.09	4.04	4.34	4.24	4.20	3.99
	Heating capacity <sup>3</sup>	kW	4.09	5.33	7.51	9.40	11.0	16.4
	Power input <sup>3</sup>	kW	1.0	1.3	1.7	2.2	2.6	4.1
Max/min temperature	Cooling circuit	°C	20/-10	20/-10	20/-10	20/-10	20/-10	20/-10
	Heating circuit	°C	60/20	60/20	60/20	60/20	60/20	60/20
Anti freeze media <sup>8</sup>			glycol + water solution with freezing point -17 ±2 °C					
Dimensions LxWxH	mm		690x596x1538	690x596x1538	690x596x1538	690x596x1538	690x596x1538	690x596x1538
Weight empty	kg		140	145	150	155	165	175
Weight filled	kg		145	151	157	162	172	184
Sound power level <sup>9</sup>	dB(A)		42	45	44	47	48	50

The measurements are performed on a limited number of heat pumps which can cause variations in the results. Tolerances in the measuring methods can also cause variations.

<sup>\*</sup>) Tap Water Stratification, our patented technology developed to ensure that the stored heat is always used optimally.

<sup>1</sup>) According to IEC61000.

<sup>2</sup>) At B0W35 Δ10K warm side (excluding circulation pumps).

<sup>3</sup>) At B0W35 according to EN 14511 (including circulation pumps).

4) Heat pump with 3 kW auxiliary heater (1-N 1.5 kW).

5) Heat pump with 6 kW auxiliary heater (1-N 3 kW).

6) Heat pump with 9 kW auxiliary heater (1-N 4.5 kW).

7) Fuse protection phase L1 (size 4 is equipped with an 1-phase compressor).

8) Always check local rules and regulations before using antifreeze.

9) Sound power level measured according to EN ISO 3741 at B0W45 (EN 12102).

\*\* Not available in this version.



Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are registered trademarks of Danfoss A/S. All rights reserved